

# LTE Omnidirectional Antenna: 700 – 2600 MHz




Model Shown: VM-700-2600

## Features

- Operation over worldwide LTE bands 700 – 2600 MHz
- Completely passive, no tuning or adjustment required
- Less than 7 inches tall
- Flange mount form factor

## VSWR

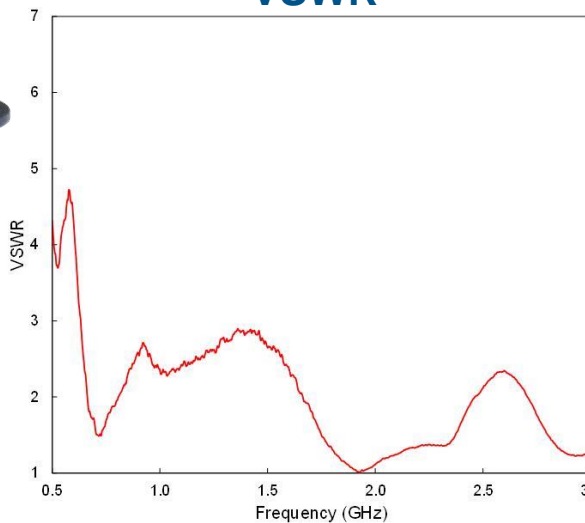

## Characteristics

<b>Model Number</b>	<b>VM-700-2600</b>
<b>Frequency</b>	700 – 2600 MHz
<b>Gain</b>	1.8 dBi @ 700 MHz 2.2 dBi @ 900 MHz 3.4 dBi @ 1700 MHz 3.5 dBi @ 1900 MHz 3.2 dBi @ 2100 MHz 3.0 dBi @ 2600 MHz
<b>VSWR</b>	< 3:1
<b>Pattern</b>	Near Omnidirectional in Azimuth
<b>Polarization</b>	Vertical
<b>Power</b>	25 W
<b>Mounting</b>	Four 0.13" holes on a 1.61" circle
<b>Size</b>	7.7" × 1.3"
<b>Weight</b>	6.3 oz
<b>Connector Type*</b>	N-type Female

\* SMA female connector also available.

## Radiation Patterns

